

# TILE LIFTER & BREAKER

## MACHINE PRINCIPLE

The chisel (tool) on the front of the machine impacts the floor and breaks up the floor covering.

## DESCRIPTION

The trolley mounted anti-vibration tile lifter and breaker is a multifunctional tool for removing all types of floor tiles and vinyl and for breaking out concrete and stone.

The integral design reduces operator fatigue and back strain, and the angle of operation can be adjusted with ease for lifting of tiles etc.

Trolley also available separately.

## FEATURES

Interchangeable tool facility for use with chisels and lifter blades

Mechanical adjustment to different angles for maximum flexibility - 20° to 80°

Built in shock reduction

Impact reducing ergonomic design and durable zinc plated frame.

## APPLICATIONS

For breaking out concrete, asphalt & stone and for removal of screeds, latex, adhesive deposits, vinyl & carpet tiles.

The method of preparation is dependent upon both the substrate and the type of product used. For further information please refer to Resdev's product specific datasheets, specification information and material safety data.




## TILE LIFTER BREAKER MACHINE SPECIFICATION

Height	540mm	Length	110mm
Width	570mm	Weight	38.5kg
Power	110v	Blows (min)	1500
Vibration Level		Usage	2-8 hours
Less than 4.00m/s <sup>2</sup>			



## ACCESSORIES

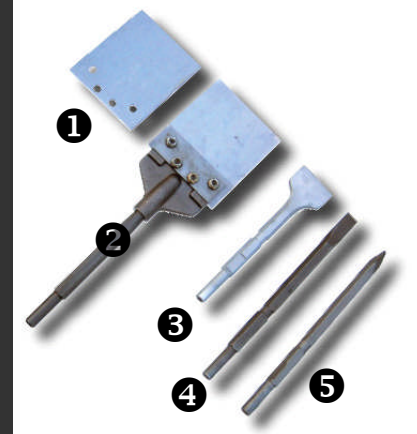

- ❶ 2mm Blade
- ❷ Tile Lifter Blade
- ❸ 50mm Chisel
- ❹ 25mm Chisel
- ❺ Point

Transformer x 2 - Dual socket 5kva 32 amp 110v



Extension cable 32amp 110v - 10m length

